



Multiport Electronic Fuel Injection

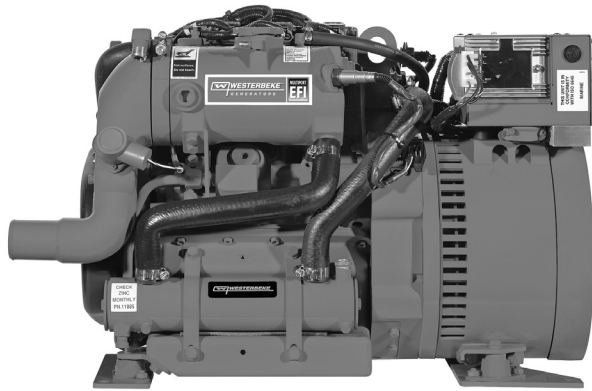

5.0/4.2 MCGB Marine Gasoline Generator
 (Shown with optional "SIDEX" exhaust)

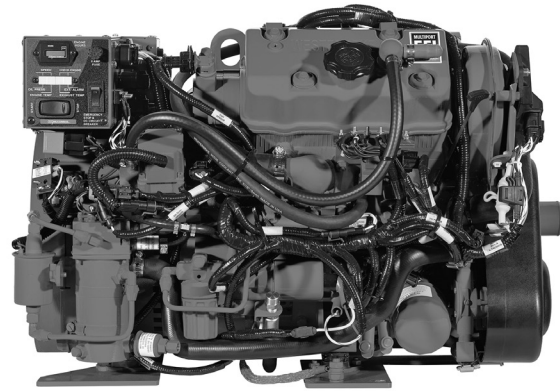

5.0/4.2 MCGB Marine Gasoline Generator
 (Shown with optional "SIDEX" exhaust)

Low-Profile, Low-Speed

The 5.0 MCGB is one of the most compact, low-speed gasoline generators on the market. Westerbeke's unique marine design allows for a high performance generator that is comparable in size to high speed designs. The lower operating speed of the 5.0 MCGB combined with a heavy duty industrial base engine contribute to a longer lasting, more reliable product.

Multiport EFI and Returnless Fuel System

The 5.0 MCGB features sequential multiport electronic fuel injection (MPI). MPI provides optimum fuel efficiency, easy starting, improved reliability and reduced emissions. In conjunction with MPI, electronic speed control maintains the engine at a constant speed (precise frequency regulation) and virtually eliminates "bogging down" when load is applied. A water cooled returnless fuel system aids in the prevention of vapor lock for improved performance in high ambient temperatures. MPI also features advanced diagnostic capabilities.

Smooth and Quiet Operation

Featuring a 3-cylinder, industrial base engine operating at an electronically controlled 1800 rpm, the 5.0 MCGB is extremely smooth and quiet running.

Five Year Limited Warranty

The 5.0 MCGB is backed by Westerbeke's 5-year limited warranty.

Standard Features

- Simple, "one touch" start/stop control panel with running hour meter and warning annunciation light strip
- Multiport EFI
- Water-cooled returnless fuel system
- Electronic governing
- Safety warnings and shut-downs: overspeed, underspeed, low oil pressure, high exhaust and coolant temperature and more
- Fresh water cooling and coolant recovery tank
- Field convertible to 50 or 60Hz
- A.C. circuit breaker
- 10 amp battery charger
- Water injected exhaust elbow
- Belt-driven raw water pump
- Vibration isolators
- Remote lube oil filter
- Lube oil drain hose
- Belt guard
- Operators' manual and parts list
- Meets applicable U.S.C.G. regulations
- Meets CARB & U.S. EPA regulations
- CE certified

Optional Venclosure (Not sold separately)



Dimensions: 30.3 x 21.6 x 18.8 inches
 (LxWxH) 768 x 550 x 477 mm
 Weight: 20 lbs. (9 kg)

